

NSV Energy LLC
35 Hickory Springs Industrial Drive
Canton GA 30115




Stock #DS11

600 amps Outdoor S & C Padmounted Gear PMH-9, Source transfer, Catalog number 56252R2-F2Y2-S228, S/N 115146, 14.4 kv nominal, 17 kv Maximum voltage rating. 3 phase, 60 hz, 1k ka RMS, 36.4 ka peak, 350 MVA, 600 amps Mini Rupter switch. SML-20 fuse max 200E or 200K (at this time no fuse or fuse end fitting installed), Made in USA, one door hinge need repair

Shipping size: 84" L x 82" W x 58" H 2200 lbs



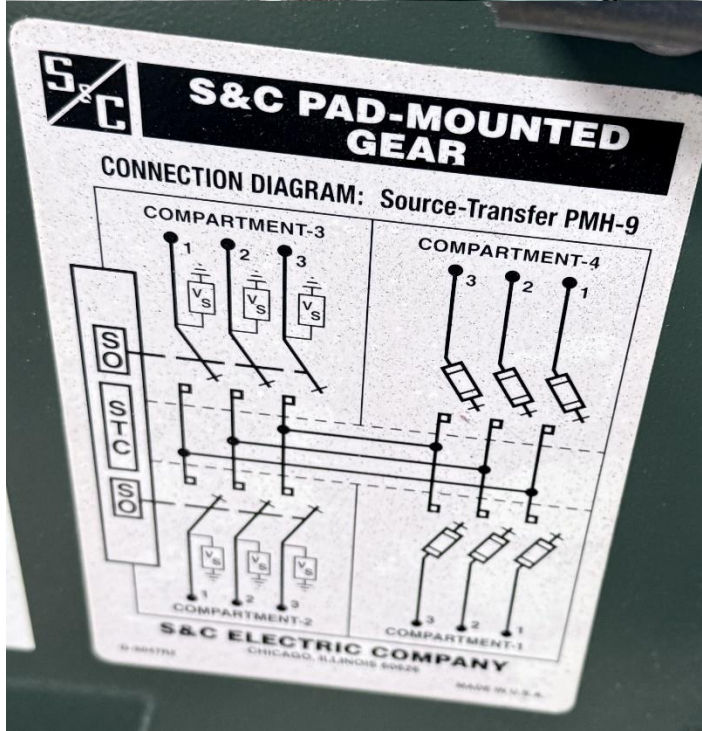



S&C PAD-MOUNTED GEAR

OVERALL RATINGS:

VOLTAGE, KV

NOMINAL

14.4

MAX. DESIGN

17.0

BIL

95

POWER FREQ. WITHSTAND

35

POWER FREQ., HZ

60

SHORT-CIRCUIT:

AMPERES, PEAK,
PEAK WITHSTAND

36 400

AMPERES, RMS SYM.,
ONE-SEC. SHORT-TIME
WITHSTAND

14 000

MVA, THREE-PHASE AT
RATED NOMINAL
VOLTAGE

350

MAIN BUS RATINGS, AMPERES:

CONTINUOUS CURRENT

600

SHORT-CIRCUIT:

PEAK, PEAK WITHSTAND

36 400

RMS SYM., ONE-SEC.
SHORT-TIME WITHSTAND

14 000

FUSE RATINGS—TYPE SML-20 (WITH UNI-RUPTER™), AMPERES:

MAX. CONTINUOUS CURRENT

200E OR 200K

LOAD SPLITTING AND
LOAD DROPPING

200

FAULT-MAKING, DUTY-CYCLE,
THREE-TIME:

PEAK

36 400

RMS SYM.

14 000

MINI-RUPTER® SWITCH RATINGS, AMPERES:

CONTINUOUS CURRENT

600

LIVE SWITCHING:

LOAD SPLITTING AND
LOAD DROPPING

600

SHORT-CIRCUIT:

PEAK, PEAK WITHSTAND

36 400

RMS SYM., ONE-SEC.
SHORT-TIME WITHSTAND

14 000

FAULT-MAKING, DUTY-CYCLE,
THREE-TIME:

PEAK

36 400

RMS SYM.

14 000

CAUTION—Before operating, inspecting, or maintaining this
switchgear, refer to the applicable S&C Instruction Sheet(s).

S&C ELECTRIC COMPANY
CHICAGO, ILLINOIS

MADE IN U.S.A.

G-4702R4