

NSV Energy LLC
 35 Hickory Springs Industrial Drive
 Canton GA 30115




Stock # VFD34

Unused Allen Bradley PowerFlex 525 VFD , cat# 25B-D024N104 series A Power 11 kw 15 hp , input voltage 0-460 V AC, 3 phase , continuous 24 amps, 0- 500 hz. 60 sec Ovid 36 amps Serial No.

5BD024N0T21100068, C(UL) listed, Made in Taiwan

Shipping size 14" x 8" x 11" 8.3 lbs

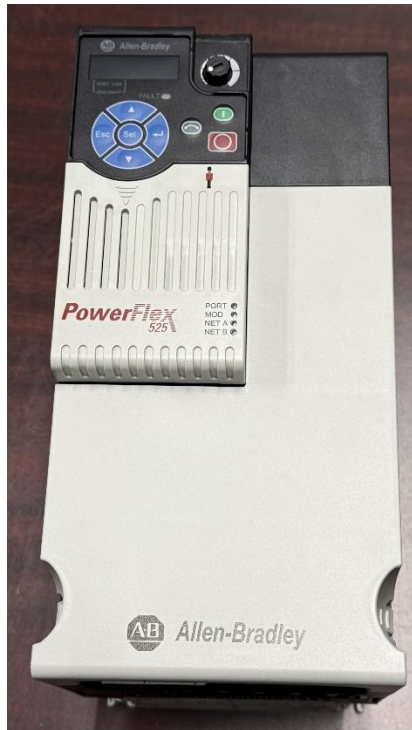

Cat No. 25B-D024N104

IP20 / UL Open-Type (rated -20°C to 50°C Ambient).
 IP20 / UL Open-Type with top fan kit installed (rated -20°C to 70°C Ambient).
 IP30 / NEMA 1/ UL Type 1 with top cover and optional conduit box kit installed (rated -20°C to 45°C Ambient). Refer to user manual.

Power: 11kW/15HP

Input: 3 Phase, 380-480V, 47 - 63 Hz
 AC Voltage Range: 323-528

Output: 3 Phase, 0-500 Hz
 AC Voltage Range: 0-460
 Continuous Amps: 24.0
 60 Sec Ovid Amps: 36.0

SHORT CIRCUIT CURRENT: 100KA
 POWER TERMINAL WIRE:
 Use 75°C Cu Wire (Use 90°C Cu Wire if > 50°C ambient)
 5.3 mm² - 13.3 mm² (10 - 6 AWG)
 Torque 1.96 Nm (17.4 in.-lbs.)

Input current is scaled by motor current.

OUTPUT	INPUT
24.0	26.4
19.2	21.1
15.6	17.2
12.0	13.2

S/N: 5BD024N0T21100068
 FRN: 6.001
 生产日期: MFD. IN 2021 ON MAR.03
 PRODUCT OF TAIWAN

Rockwell Automation, 1201 S 2nd St, Milwaukee, WI 53204, USA

SERIES A

UL US LISTED IND. CONT. EQ. E59272
 CE 0035 Ex II (2) GD TUV 12 ATEX 7199 X
 TUV Rheinland Functional Safety Type Approved
 EAC KC

Allen-Bradley